U.S. installation guideline

linea pb

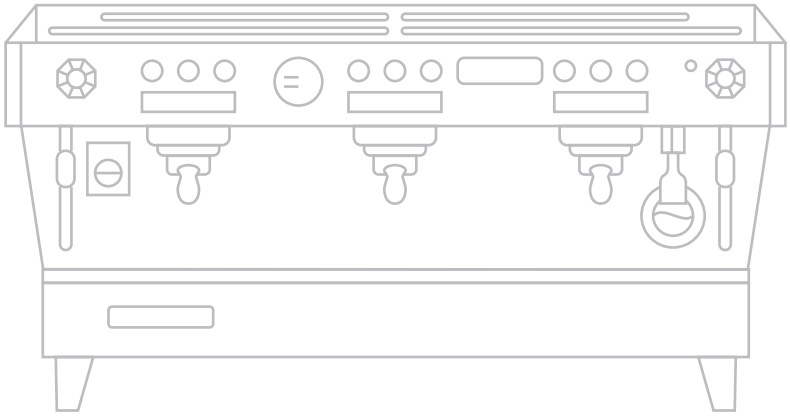

Dimensions	2 group	3 group	4 group
Height	21”	21”	21”
Width	28”	38”	47”
Depth	23”	23”	23”
Working Height°	13.5”	13.5”	13.5”
Weights			
Shipping Weight	190 lbs	238 lbs	264 lbs
Operating Weight	204.9 lbs	255.6 lbs	312.4 lbs
Power			
Voltage/Phase/Cycle	208-240 VAC 1Φ 60Hz	208-240 VAC 1Φ 60Hz	208-240 VAC 1Φ 60Hz
Wattage	4600	6100	8000
Full Load Amp Draw	22	28	37
Max. Dist. from Outlet*	5 ft	5 ft	5 ft
NEMA Plug and Outlet*	6-30P; 6-30R	6-50P; 6-50R	6-50P; 6-50R

Water		Drainage		External Pump	
Water Flow Rate	2GPM	Max. Dist.*	5 ft	Dimensions	12”x12”x12”
Dynamic Water Pressure †	45PSI	Drain Slope*‡	Min. 1/4” per foot	Max. Dist. from Water Supply*	4 ft
Min. Pipe Size Diameter*	3/8”			Max. Dist. from Machine	8 ft
Water Connection*	3/8” male comp.			Counter Hole Diameter	2.5”
Water Quality	Contact us for a free water test kit. See water specifications.				

* suggested | † regulate as needed | ‡ This machine must be installed in accordance with the applicable federal, state and local plumbing codes
° Height from the base of the machine to the group head

la marzocco

handmade in florence

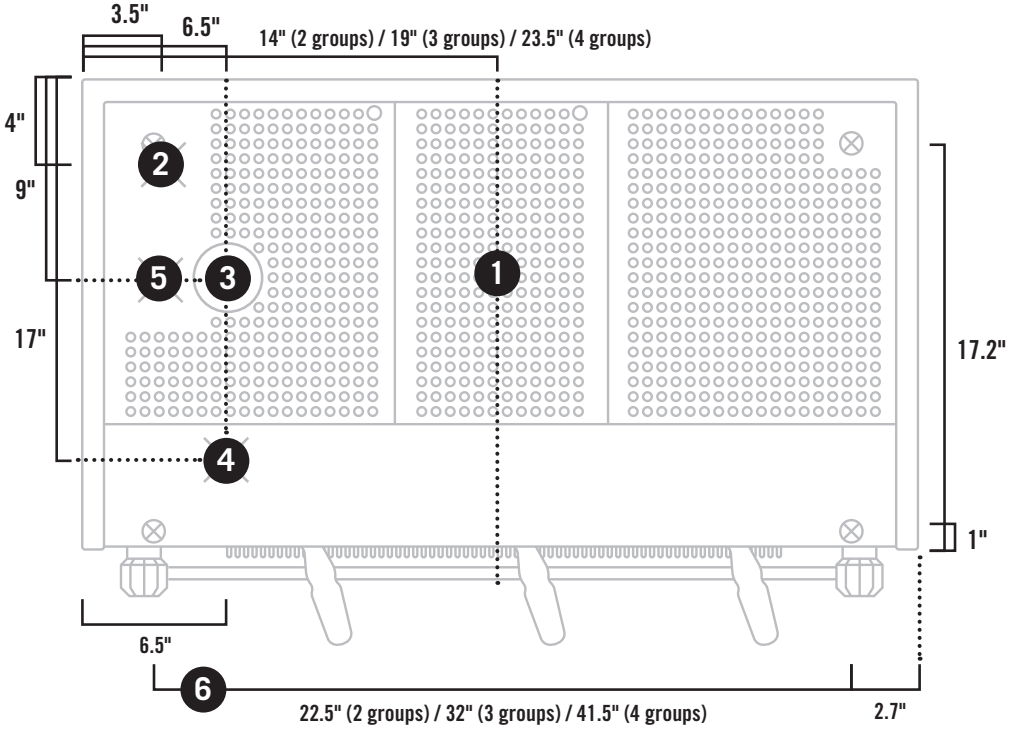

top view

1. center line of the machine
2. position of the power cord
3. suggested diameter of counter hole: 2.5”
4. position of the drain tube
5. position of the water inlet hose
6. width of legs per model

⊗ machine leg location

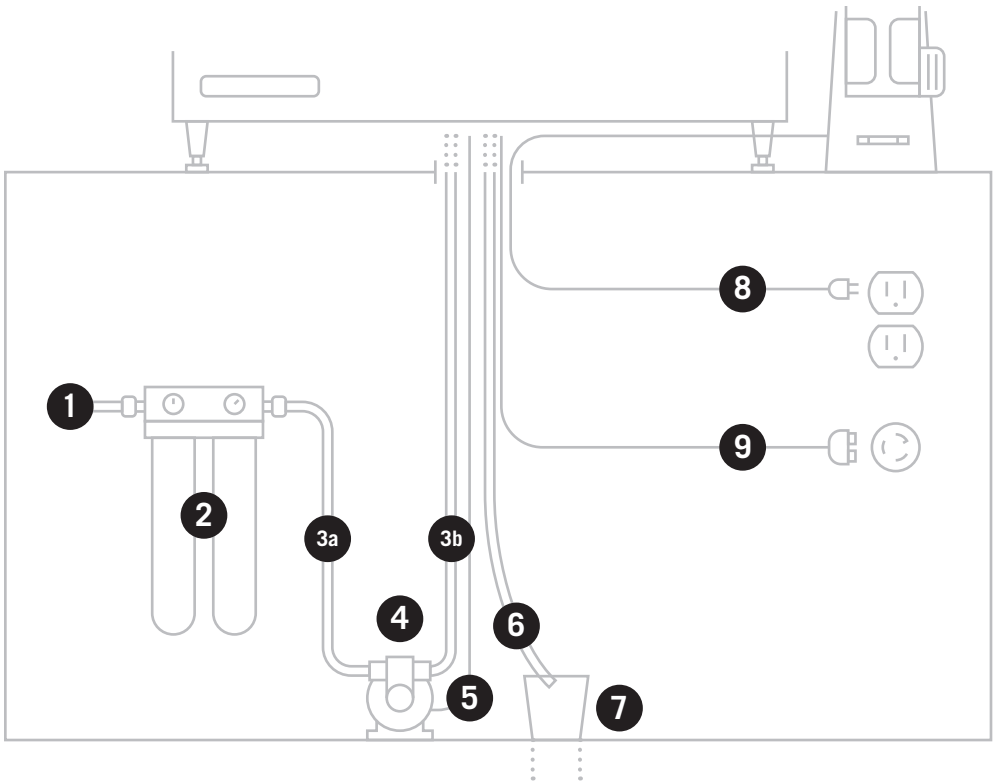

front view

1. 3/8” cold water supply
2. water filter required (not provided), see water specifications below.

3a. 3/8” compression cold water supply line suggested max. dist. from water supply 4’

3b. 3/8” BSPP cold water supply line suggested max. dist. from water supply 8’

4. pump and motor
5. electrical supply to motor from machine
6. 3/4” flexible drainline (min. 0.25”/1’ slope)
7. floor drain
8. 110V, 15amp elec. supply to grinder
9. 208-240V single phase elec. supply to espresso machine (plug not provided)

water specifications

La Marzocco recommends that your filtration system produces water with the following properties:

T.D.S.	90—150ppm	**pH**	6.5—8
Total Hardness	70—100 ppm	**Alkalinity**	40—80ppm
Total Iron	0—0.02ppm	**Chloride**	0—30ppm
Free Chlorine	0—0.05ppm	**Line Pressure**	45—80 PSI
Total Chlorine	0—0.1ppm	**Flow Rate**	2 GPM or 8 LPM

La Marzocco North American Headquarters I 1553 NW Ballard Way, Seattle, WA 98107

t. 206.706.9104 **f.** 206.706.9106 I info@lamarzoccousa.com I www.lamarzoccousa.com