U.S. installation guideline

strada

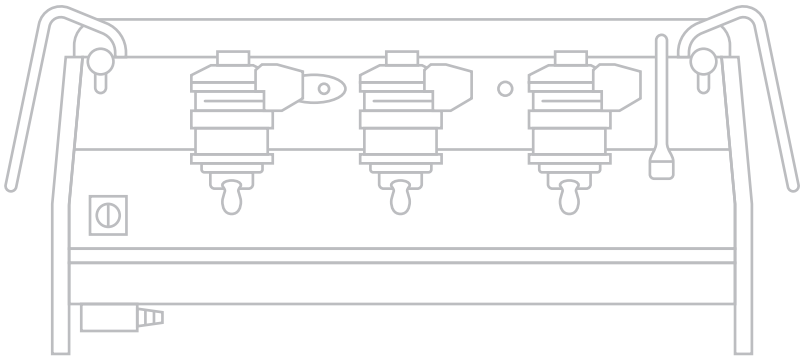

Dimensions	2 group	3 group
Height	19"	19"
Width	32"	40"
Depth	27"	27"
Working Height°	12"	12"

Weights		
Shipping Weight	283 lbs	335 lbs
Operating Weight	264.5 lbs	328.4 lbs

Power		
Voltage/Phase/Cycle	208-240 VAC 1Φ 60Hz	208-240 VAC 1Φ 60Hz
Wattage	4900	6400
Full Load Amp Draw	21	30
Max. Dist. from Outlet*	5'	5'
NEMA Plug and Outlet*	6-30P; 6-30R	6-50P; 6-50R

Water		Drainage		External Pump§	
Water Flow Rate	2GPM	Max. Dist.*	5'	Dimensions	12" × 12" × 12"
Dynamic Water Pressure †	45PSI	Drain Slope*‡	Min. 1/4" per foot	Max. Dist. from Water Supply*	4'
Min. Pipe Size Diameter*	3/8"			Max. Dist. from Machine	8'
Water Connection*	3/8" male comp.			Counter Hole Diameter	2.75"
Water Quality	Contact us for a free water test kit. See water specifications.				

* suggested | † regulate as needed | ‡ This machine must be installed in accordance with the applicable federal, state and local plumbing codes
° Height from the base of the machine to the group head | § Optional on strada ep when plumbed

la marzocco

handmade in florence

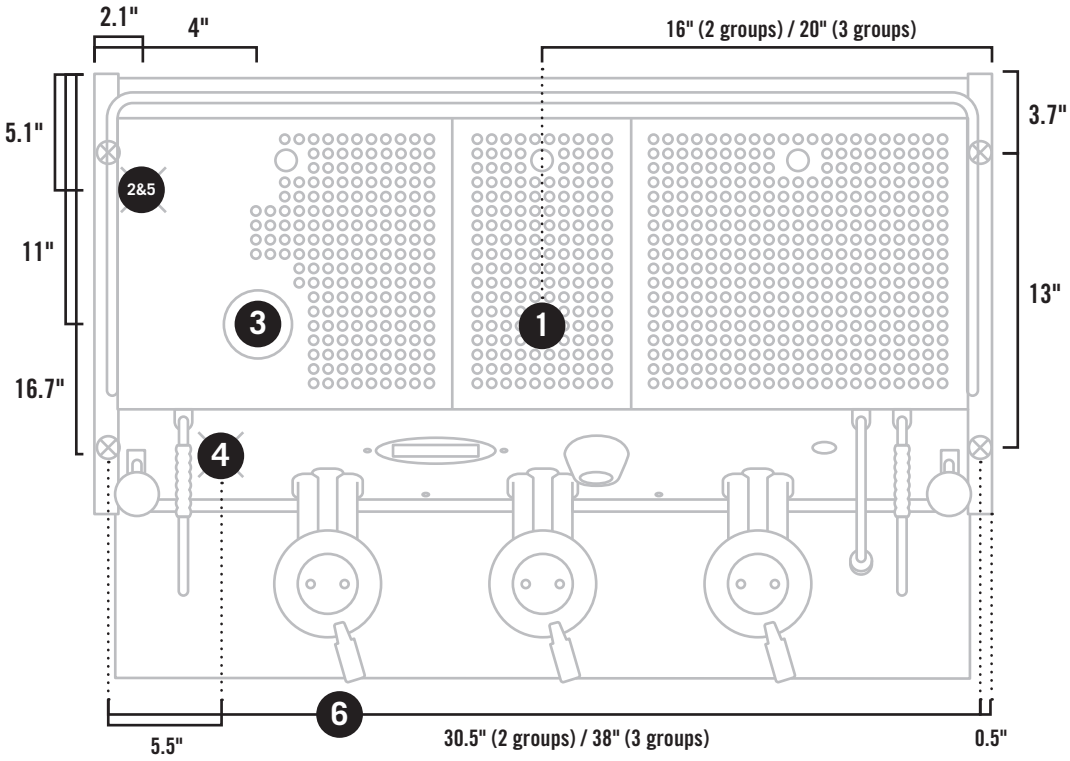

top view

1. center line of the machine
2. position of the power cord
3. suggested diameter of counter hole: 2.75"
4. position of the drain tube
5. position of the water inlet hose
6. width of legs per model

⊗ machine leg location

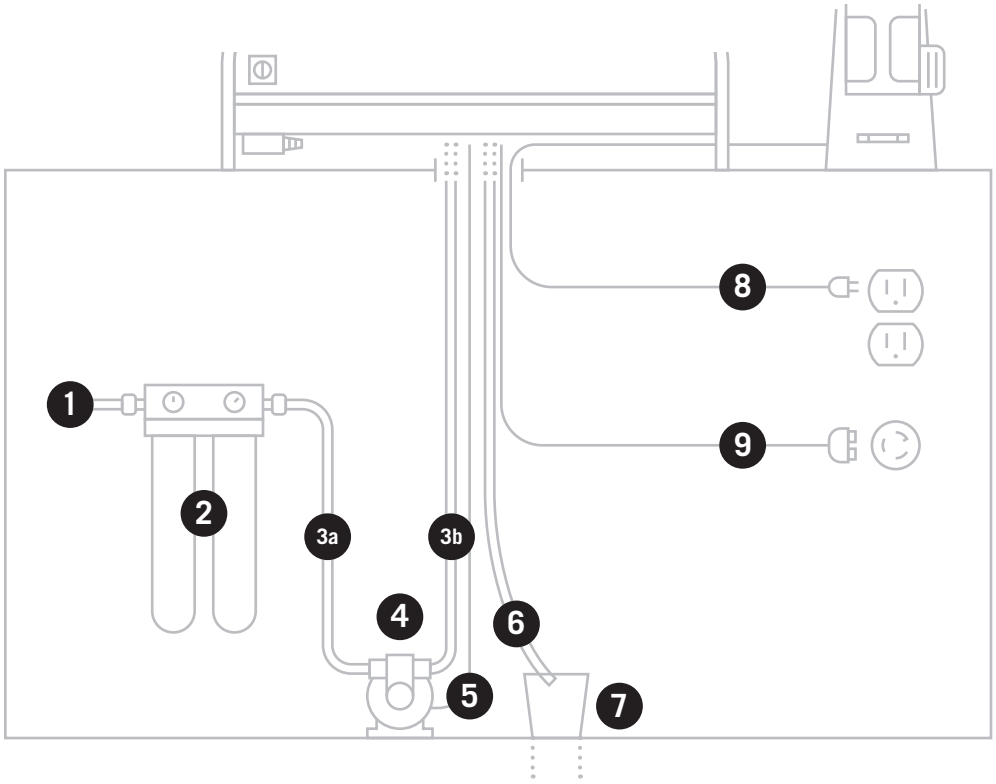

front view

1. 3/8" cold water supply
2. water filter required (not provided), see water specifications below.

3a. 3/8" compression cold water supply line suggested max. dist. from water supply 4'

3b. 3/8" BSPP cold water supply line suggested max. dist. from water supply 8'

4. pump and motor (MP & EE configurations only)
5. electrical supply to motor from machine
6. 3/4" flexible drainline (min. 0.25"/1' slope)
7. floor drain
8. 110V, 15amp elec. supply to grinder
9. 208-240V single phase elec. supply to espresso machine (plug not provided)

water specifications

La Marzocco recommends that your filtration system produces water with the following properties:

T.D.S.	90—150ppm	**pH**	6.5—8
Total Hardness	70—100 ppm	**Alkalinity**	40—80ppm
Total Iron	0—0.02ppm	**Chloride**	0—30ppm
Free Chlorine	0—0.05ppm	**Line Pressure**	45—80 PSI
Total Chlorine	0—0.1ppm	**Flow Rate**	2 GPM or 8 LPM

La Marzocco North American Headquarters I 1553 NW Ballard Way, Seattle, WA 98107

t. 206.706.9104 **f.** 206.706.9106 I info@lamarzoccousa.com I www.lamarzoccousa.com