

U.S. installation guideline

gs3





Dimensions

Height 14" (17.5" for MP)

 Width
 16"

 Depth
 21"

 Working Height°
 10.25"

Weights

Shipping Weight 104 lbs Operating Weight 84 lbs

Power

Voltage/Phase/Cycle 120 VAC 1Φ 60Hz

Wattage 1620

Full Load Amp Draw 20 (14.6 in half power mode)

Max. Dist. from Outlet* 5

NEMA Plug and Outlet* 5-15P, plug is included

Water

Specifications for plumb-in. Disregard if using the internal water reservoir.

Water Flow Rate 2GPM
Dynamic Water Pressure † 45PSI
Min. Pipe Size Diameter* 3/8"

Water Connection* 3/8" male comp.

Water Quality Contact us for a free water test kit.

See water specifications.

Drainage


Max. Dist.* 5 ft

Drain Slope*‡ Min. 1/4" per foot

Counter Hole Diameter 2"




 $^{^{\}circ}$ Height from the base of the machine to the group head



top view

- 1. center line of the machine
- 2. position of the power cord
- 3. suggested diameter of counter hole: 2.5"
- 4. position of the drain tube
- 5. position of the water inlet hose
- 6. width of legs per model
- machine leg location

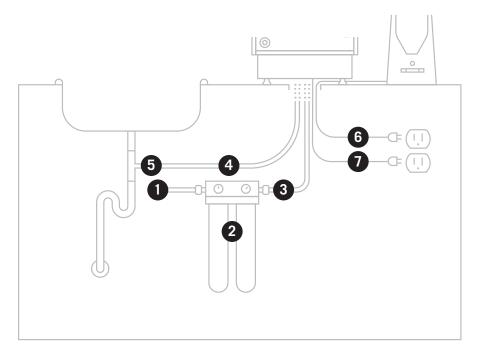

front view

Specifications for plumb-in. Disregard if using the internal water reservoir.

- 1. 3/8" cold water supply
- water filter required if plumbed (not provided),
 see water appointment helps.
 - see water specifications below.
- 3. 3/8" BSPP cold water supply line suggested max. dist. from water supply 8'
- 4. 3/4" flexible drainline (min. 0.25"/1' slope)
- 5. sink drain above p-trap
- 6. 120V, 15amp electrical supply to grinder
- 7. 120V, electrical supply to espresso machine (plug included)

water specifications

La Marzocco recommends that your filtration system produces water with the following properties:

90—150ppm
70—100 ppm
0-0.02ppm
0-0.05ppm
0-0.1ppm

pH 6.5—8
Alkalinity 40—80ppm
Chloride 0—30ppm
Line Pressure 45—80 PSI
Flow Rate 2 GPM or 8 LPM