


U.S. installation guideline

linea classic s

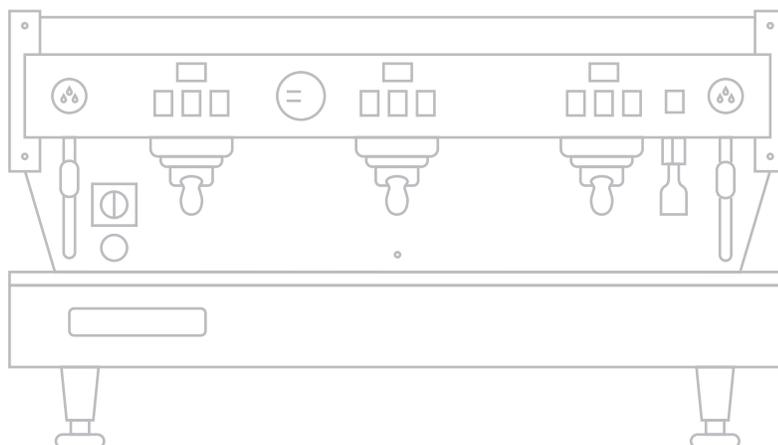

| Specifications | 1 group | 2 group | 3 group | 4 group |
|-------------------------|---------------------|---------------------|---------------------|---------------------|
| Height | 20.5" | 20.5" | 20.5" | 20.5" |
| Width | 20" | 28" | 37" | 46" |
| Depth | 23" | 23" | 23" | 23" |
| Weight | 90 lbs | 130 lbs | 164 lbs | 236 lbs |
| Power | | | | |
| Voltage/Phase/Cycle | 208-240 VAC 1Φ 60Hz |
| Wattage | 2500 | 4600 | 6100 | 8000 |
| Full Load Amp Draw | 12 | 22 | 28 | 37 |
| Max. Dist. from Outlet* | 5' | 5' | 5' | 5' |
| NEMA Plug and Outlet* | 6-20P; 6-20R | 6-30P; 6-30R | 6-50P; 6-50R | 6-50P; 6-50R |

| Water | Drainage | External Pump | |
|--------------------------|---|-------------------------------|-----------------|
| Water Flow Rate | 2GPM | Dimensions | 12" × 12" × 12" |
| Dynamic Water Pressure † | 45PSI | Max. Dist. from Water Supply* | 4' |
| Min. Pipe Size Diameter* | 3/8" | Max. Dist. from Machine | 8' |
| Water Connection* | 3/8" male comp. | Counter Hole Diameter | 2.5" |
| Water Quality | Contact us for a free water test kit. See water specifications. | | |


* suggested | † regulate as needed | ° Height from the base of the machine to the group head

‡ This machine must be installed in accordance with the applicable federal, state and local plumbing codes




la marzocco

handmade in florence

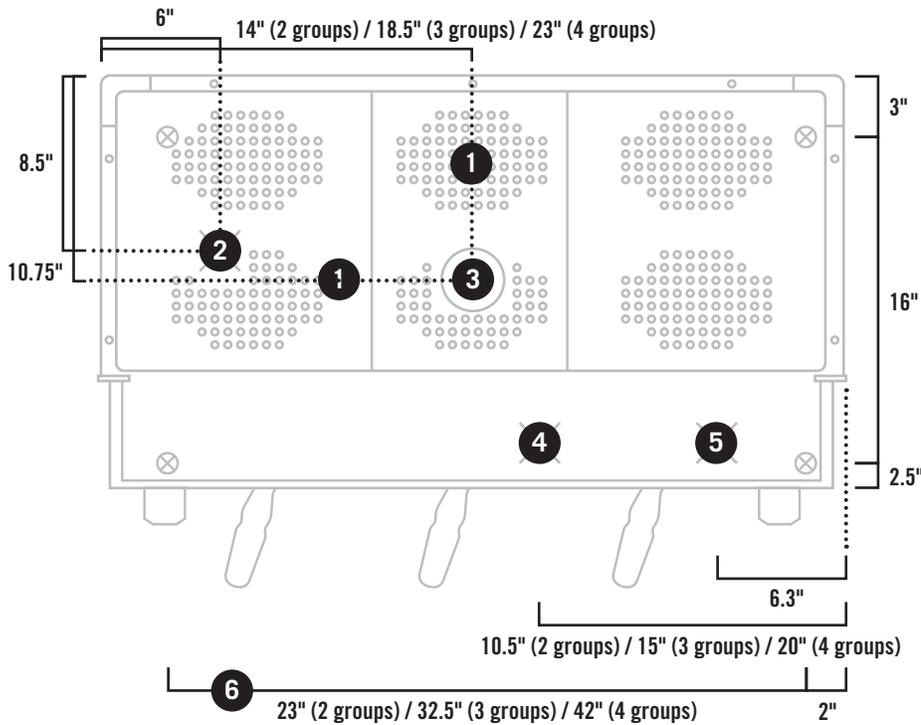

top view

1. center line of the machine
 2. position of the power cord
 3. suggested diameter of counter hole:
2.5"
 4. position of the drain tube
 5. position of the water inlet hose
 6. width of legs per model
- ⊗ machine leg location

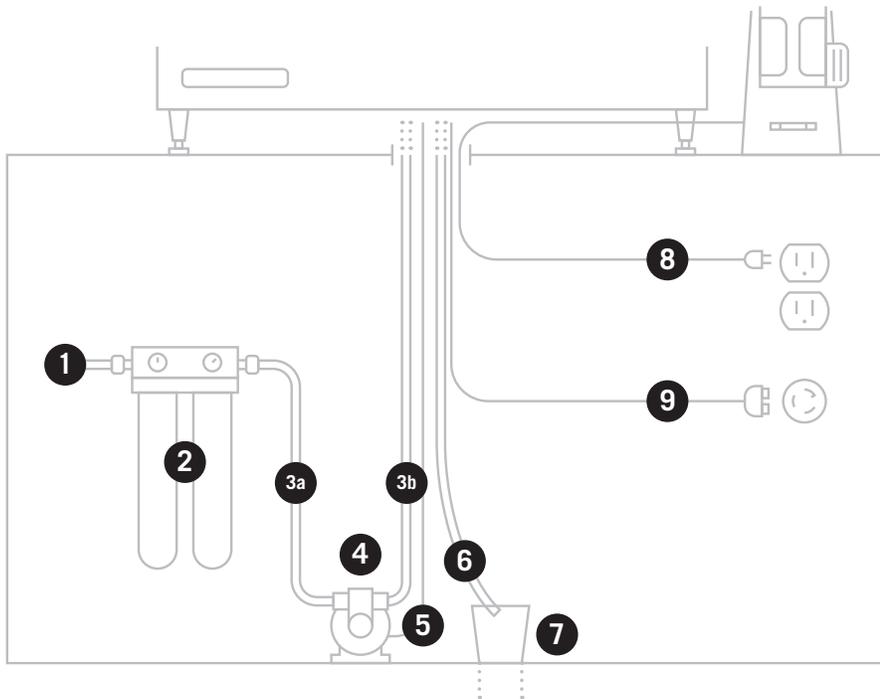

front view

1. 3/8" cold water supply
2. water filter required (not provided),
see water specifications below.
- 3a. 3/8" compression cold water supply line
suggested max. dist. from water supply
4'
- 3b. 3/8" BSPP cold water supply line
suggested max. dist. from water supply
8'
4. pump and motor
5. electrical supply to motor from machine
6. 3/4" flexible drainline (min. 0.25"/1'
slope)
7. floor drain
8. 110V, 15amp elec. supply to grinder
9. 208-240V single phase elec. supply to
espresso machine (plug not provided)

water specifications

La Marzocco recommends that your filtration system produces water with the following properties:

| | |
|----------------|------------|
| T.D.S. | 90—150ppm |
| Total Hardness | 70—100 ppm |
| Total Iron | 0—0.02ppm |
| Free Chlorine | 0—0.05ppm |
| Total Chlorine | 0—0.1ppm |

| | |
|---------------|----------------|
| pH | 6.5—8 |
| Alkalinity | 40—80ppm |
| Chloride | 0—30ppm |
| Line Pressure | 45—80 PSI |
| Flow Rate | 2 GPM or 8 LPM |