



la marzocco
handmade in florence

la marzocco USA technical bulletin 194

Linea Classic S new firmware v1.35

June 9, 2024


Dear Friends,

We are pleased to announce new firmware v1.35 for Linea Classic S, which is now available to update through the La Marzocco Pro app. Please note: this firmware update is required to continue access to the machine from the app.

Firmware v1.35 fixes bugs and brings programmable rinse functionality to the third (continuous) button. In the barista menu, quick rinse can be set independently on each group for a duration of 1 to 5 seconds. Continuous is the default setting.

To enable rinse:

1. On Group 1 press and hold T3 (continuous) until the menu appears then release.
The display will show **PRG**.
2. Press T2 to advance to **GR5** and press T3 to enter.
3. Select a group using T2 to advance (**GR1** - group 1, **GR2** - group 2, **GR3** - group 3, **GR4** - group 4) press T3 to enter. Now you can select a value of 0 for continuous operation or 1 to 5 for quick rinse in seconds.
4. To Exit Barista Programming press T3 to advance to End and Press T3 again to return to normal operation

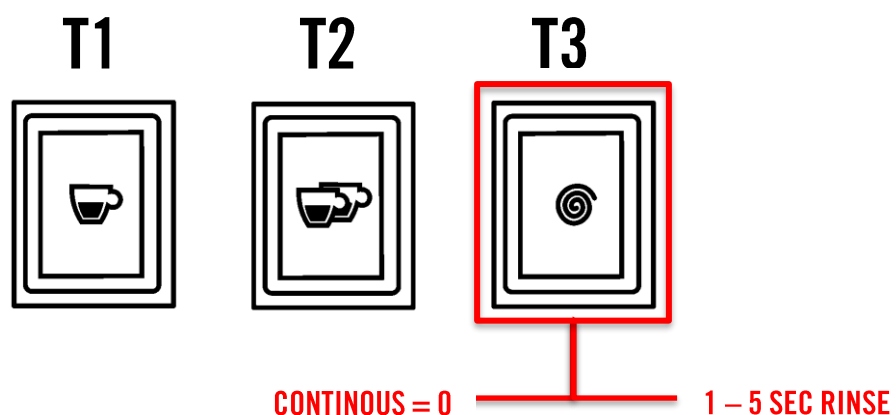

Do not hesitate to contact our solutions team with any questions you may have about this technical bulletin.
solutions.usa@lamarzocco.com
206.706.9104 x 101